



LINE SSL P G/K ○

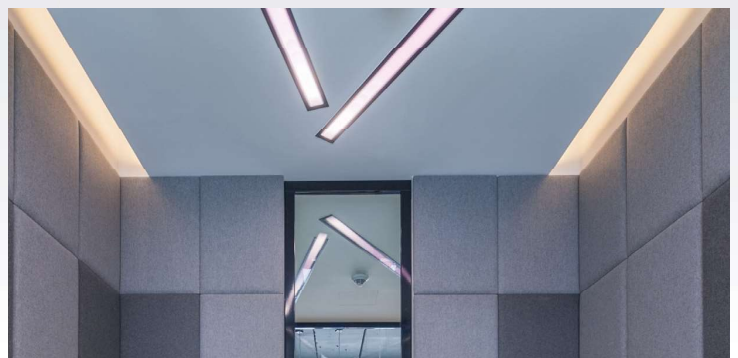

FINISH COLORS:

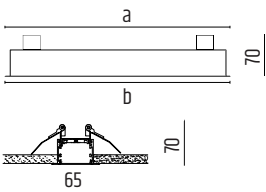

LINE SSL P G/K 3000K

dimensions (mm)		number of LED modules	value Φ (lm) per Led module			
			450/650/780 (lm)	power of system (W)	940/1100/1250 (lm)	power of system (W)
a	b		code		code	
572	586	2	SSLP8041-GK	5,5 / 8,0 / 9,5	SSLP8055-GK	11,5 / 13,5 / 15,3
855	869	3	SSLP8043-GK	8,3 / 12,0 / 14,3	SSLP8057-GK	17,3 / 20,3 / 23,0
1138	1152	4	SSLP8045-GK	11,0 / 16,0 / 19,0	SSLP8059-GK	23,0 / 27,0 / 30,6
1421	1435	5	SSLP8047-GK	13,8 / 20,0 / 23,8	SSLP8061-GK	28,8 / 33,8 / 38,3
1704	1718	6	SSLP8049-GK	16,5 / 24,0 / 28,5	SSLP8063-GK	34,5 / 40,5 / 46,0
1987	2001	7	SSLP8051-GK	19,3 / 28,0 / 33,3	SSLP8065-GK	40,0 / 47,0 / 53,5
2270	2284	8	SSLP8053-GK	22,1 / 32,0 / 38,1	SSLP8067-GK	46,0 / 54,0 / 61,0

LINE SSL P G/K 4000K

dimensions (mm)		number of LED modules	value Φ (lm) per Led module			
			450/650/780 (lm)	power of system (W)	940/1100/1250 (lm)	power of system (W)
a	b		code		code	
572	586	2	SSLP8042-GK	5,5 / 8,0 / 9,5	SSLP8056-GK	11,5 / 13,5 / 15,3
855	869	3	SSLP8044-GK	8,3 / 12,0 / 14,3	SSLP8058-GK	17,3 / 20,3 / 23,0
1138	1152	4	SSLP8046-GK	11,0 / 16,0 / 19,0	SSLP8060-GK	23,0 / 27,0 / 30,6
1421	1435	5	SSLP8048-GK	13,8 / 20,0 / 23,8	SSLP8062-GK	28,8 / 33,8 / 38,3
1704	1718	6	SSLP8050-GK	16,5 / 24,0 / 28,5	SSLP8064-GK	34,5 / 40,5 / 46,0
1987	2001	7	SSLP8052-GK	19,3 / 28,0 / 33,3	SSLP8066-GK	40,0 / 47,0 / 53,5
2270	2284	8	SSLP8054-GK	22,1 / 32,0 / 38,1	SSLP8068-GK	46,0 / 54,0 / 61,0

HOUSING:



MONTAGE:



DIFFUSER:



OPTICS/ROTATION:



LIGHT SOURCE:



POWER SUPPLY:



CONTROL:



NORMS:

