



Three-circuit track or three phases. The track is designed for surface mounting

on the ceiling. The housing is made of an aluminium profile. The copper wires embedded in a specially designed plastic profile. The housing is powder painted

in white, black or optional gray. Permissible current load on the one circuit 16A. The

Three-phases

16A _-

16A

16A

16A

16A

16A

POWER SUPPLY: 3-circuits 3-phases

400 V

230 V


N

12

Ф

track is available in sections of 1, 2, 3 and 4 meters.

16A



L3N

TRACK L3N

ELECTRICAL SCHEME

Three-circuits

<u>16A</u>

N—o

L-

- FINISH COLORS:



ACCESSORIES - CONNECTORS

END-FEED



x.

L-FEED CONNECTOR





X-FEED CONNECTOR

27

12 M

JOINTING CONNECTOR



MIDDLE FEED CONNECTOR



ADJUSTABLE CONNECTOR


HOUSING:





IP20 CE

TRACK CONNECTION DIAGRAM

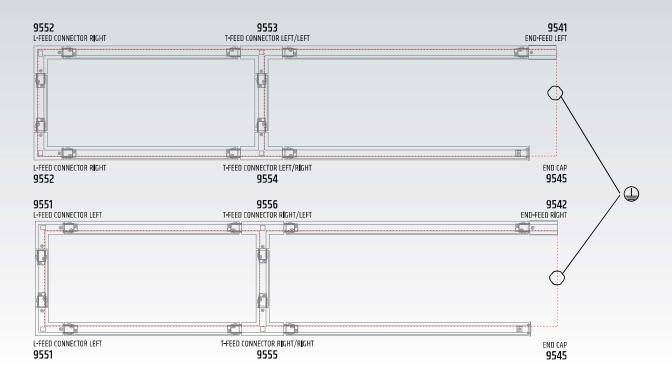

NAME	catalog number	
	white	black
TRACK 4 meters	9504W	9504B
TRACK 3 meters	9503W	9503B
TRACK 2 meters	9502W	9502B
TRACK 1 meter	9501W	9501B
END-FEED LEFT	9541W	9541B
END-FEED RIGHT	9542W	9542B
END CAP	9545W	9545B
JOINTING CONNECTOR	9550W	9550B
MIDDLE FEED CONNECTOR	9560w	9560B
L-FEED CONNECTOR RIGHT	9552W	9552B
L-FEED CONNECTOR LEFT	9551W	9551B
T-FEED CONNECTOR RIGHT/RIGHT	9555W	9555B
T-FEED CONNECTOR LEFT/LEFT	9553W	9553B
T-FEED CONNECTOR RIGHT/LEFT	9556W	9556B
T-FEED CONNECTOR LEFT/RIGHT	9554W	9554B
X-FEED CONNECTOR	9557W	9557B
ADJUSTABLE CONNECTOR	9559W	9559B
CEILING BRACKET	9571W	9571B
SUSPENSION SET 1,5 meters	9572W	9572B
SUSPENSION SET 4 meters	9575W	9575B
T-BRACKET FOR "IN ROW" USE JUNCTION	9558W	9558B

MOUNTING ACCESSORIES

CEILING BRACKET



SUSPENSION SET 1,5 METERS OR 4 METERS



T-BRACKET FOR "IN ROW" USE JUNCTION

















OUTSIDE



UMINAIRES

184